



SERVER  
SERVE BETTER™

### DOUBLE EZ-TOPPER™ 85899 THERMOSTATS SETTING PROCEDURE

Server Products Inc. claims no responsibility for actual serving temperature of product. It is the responsibility of the user to ensure that any product is held and served at a safe temperature.

#### To set thermostats:

- 1 PRESS BOTH SWITCHES TO "OFF" POSITIONS.
- 2 UNPLUG CORD.

**Caution- Hot:**


**If unit has already been in use, unit may still be hot. Allow unit to cool before continuing.**

- 3 REMOVE PUMPS, POUCH SUPPORTS, AND PRODUCT POUCHES.
- 4 TURN UNIT OVER TO REST UPSIDE DOWN ON COUNTERTOP OR TABLE.
- 5 LOOSEN SCREWS SECURING THERMOSTAT LOCKS/DIALS, BUT DO NOT REMOVE SCREWS.
- 6 SET THERMOSTATS AT RECOMMENDED PRODUCT SERVING TEMPERATURE; ROTATE THERMOSTAT LOCKS/DIALS BY HAND TO DESIRED TEMPERATURE.
- 7 TIGHTEN SCREWS TO LOCK THERMOSTAT SETTINGS.

**If unit is not heating properly, prior to returning for any Warranty work, please reset the thermostats to ensure proper unit heating.**

TO RESET THERMOSTATS; ROTATE THERMOSTAT LOCKS/DIALS BY HAND. ROTATE CLOCKWISE COMPLETELY AND THEN ROTATE COUNTERCLOCKWISE COMPLETELY.

THEN SET AND LOCK THERMOSTATS.

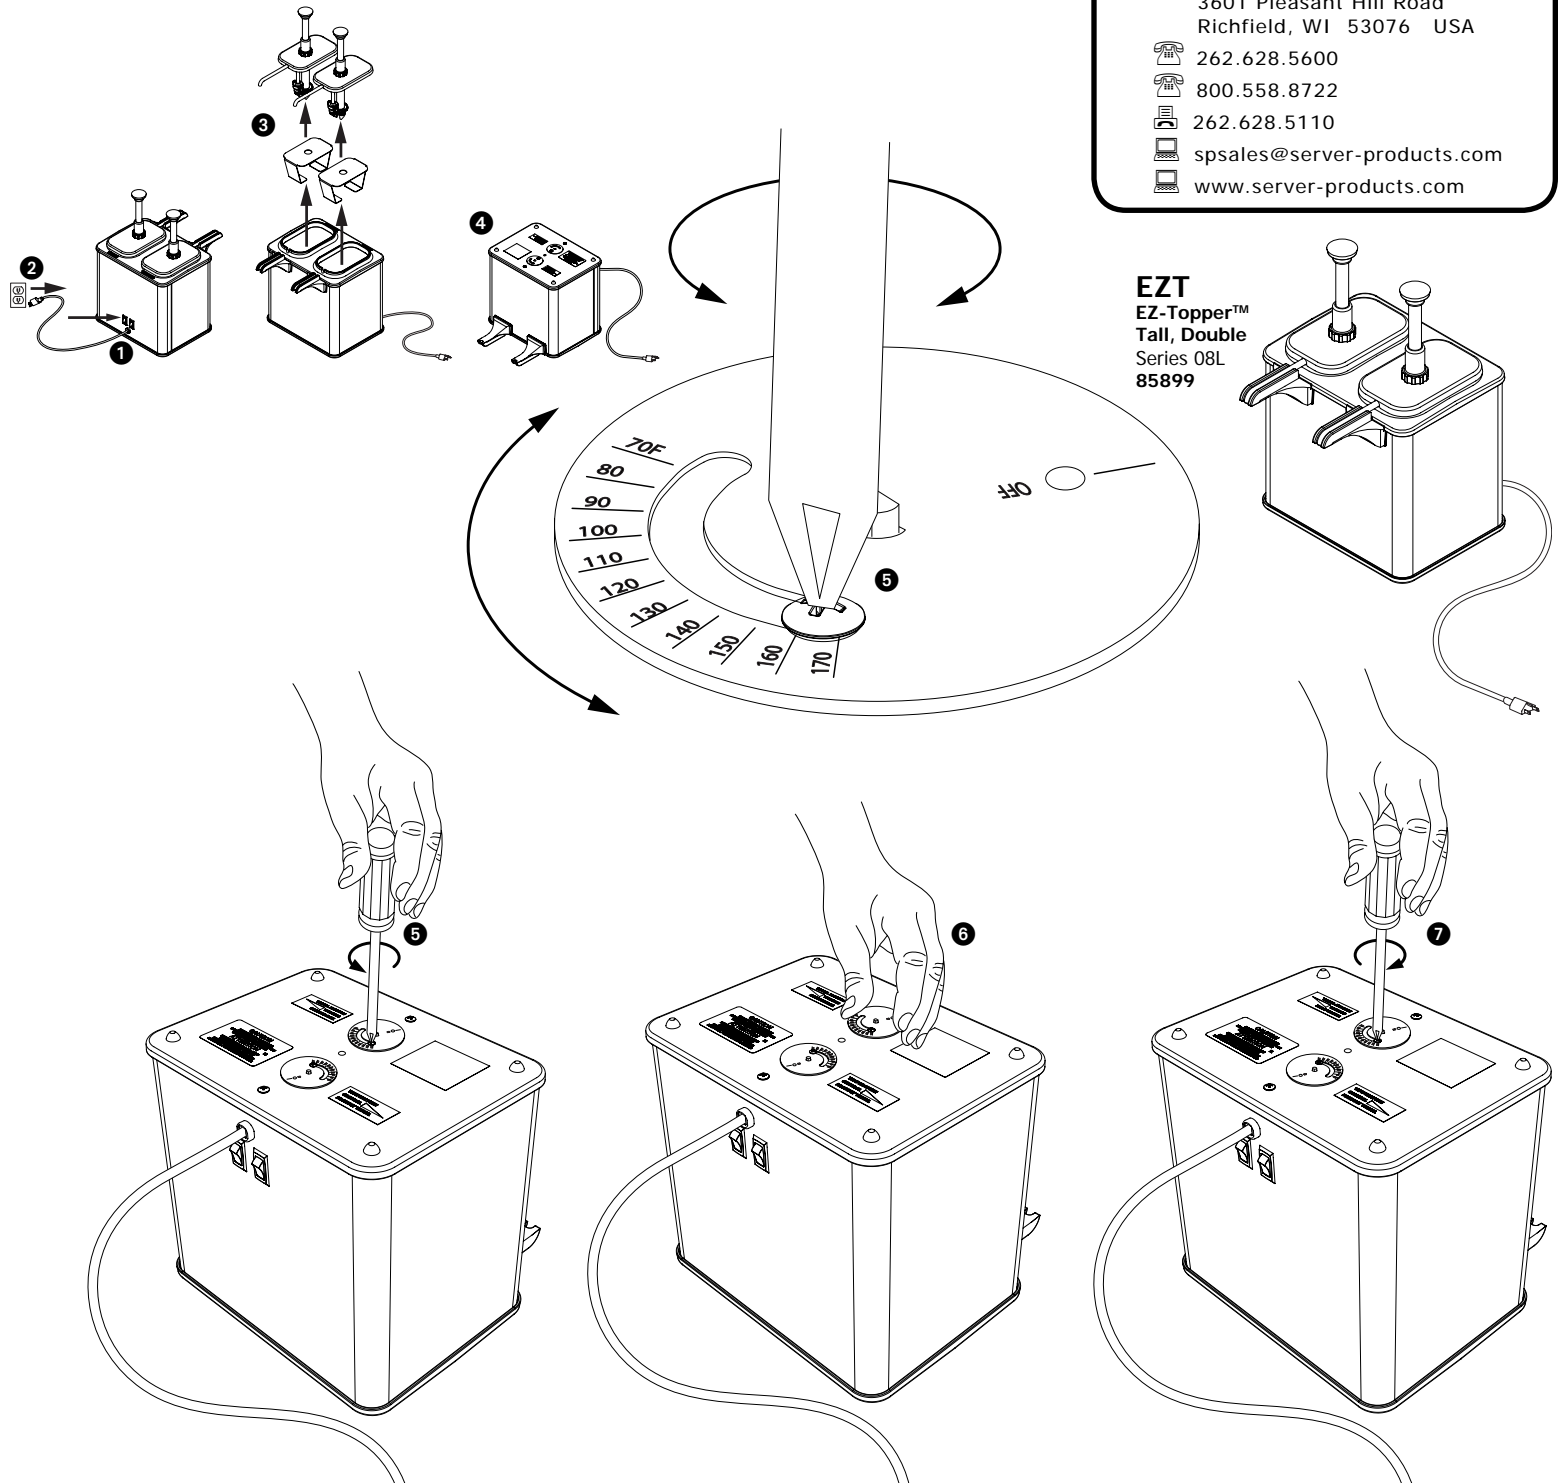

**Server Products Inc.**  
 3601 Pleasant Hill Road  
 Richfield, WI 53076 USA  
 262.628.5600  
 800.558.8722  
 262.628.5110  
 spsales@server-products.com  
 www.server-products.com

**EZT  
EZ-Topper™  
Tall, Double  
Series 08L  
85899**