



SERVER
SERVE BETTER™

DOUBLE EZ-TOPPER™ 85899 THERMOSTATS SETTING PROCEDURE

Server Products Inc. claims no responsibility for actual serving temperature of product. It is the responsibility of the user to ensure that any product is held and served at a safe temperature.

To set thermostats:

- 1 PRESS BOTH SWITCHES TO "OFF" POSITIONS.
- 2 UNPLUG CORD.

Caution- Hot:


If unit has already been in use, unit may still be hot. Allow unit to cool before continuing.

- 3 REMOVE PUMPS, POUCH SUPPORTS, AND PRODUCT POUCHES.
- 4 TURN UNIT OVER TO REST UPSIDE DOWN ON COUNTERTOP OR TABLE.
- 5 LOOSEN SCREWS SECURING THERMOSTAT LOCKS/DIALS, BUT DO NOT REMOVE SCREWS.
- 6 SET THERMOSTATS AT RECOMMENDED PRODUCT SERVING TEMPERATURE; ROTATE THERMOSTAT LOCKS/DIALS BY HAND TO DESIRED TEMPERATURE.
- 7 TIGHTEN SCREWS TO LOCK THERMOSTAT SETTINGS.

If unit is not heating properly, prior to returning for any Warranty work, please reset the thermostats to ensure proper unit heating.

TO RESET THERMOSTATS; ROTATE THERMOSTAT LOCKS/DIALS BY HAND. ROTATE CLOCKWISE COMPLETELY AND THEN ROTATE COUNTERCLOCKWISE COMPLETELY.

THEN SET AND LOCK THERMOSTATS.

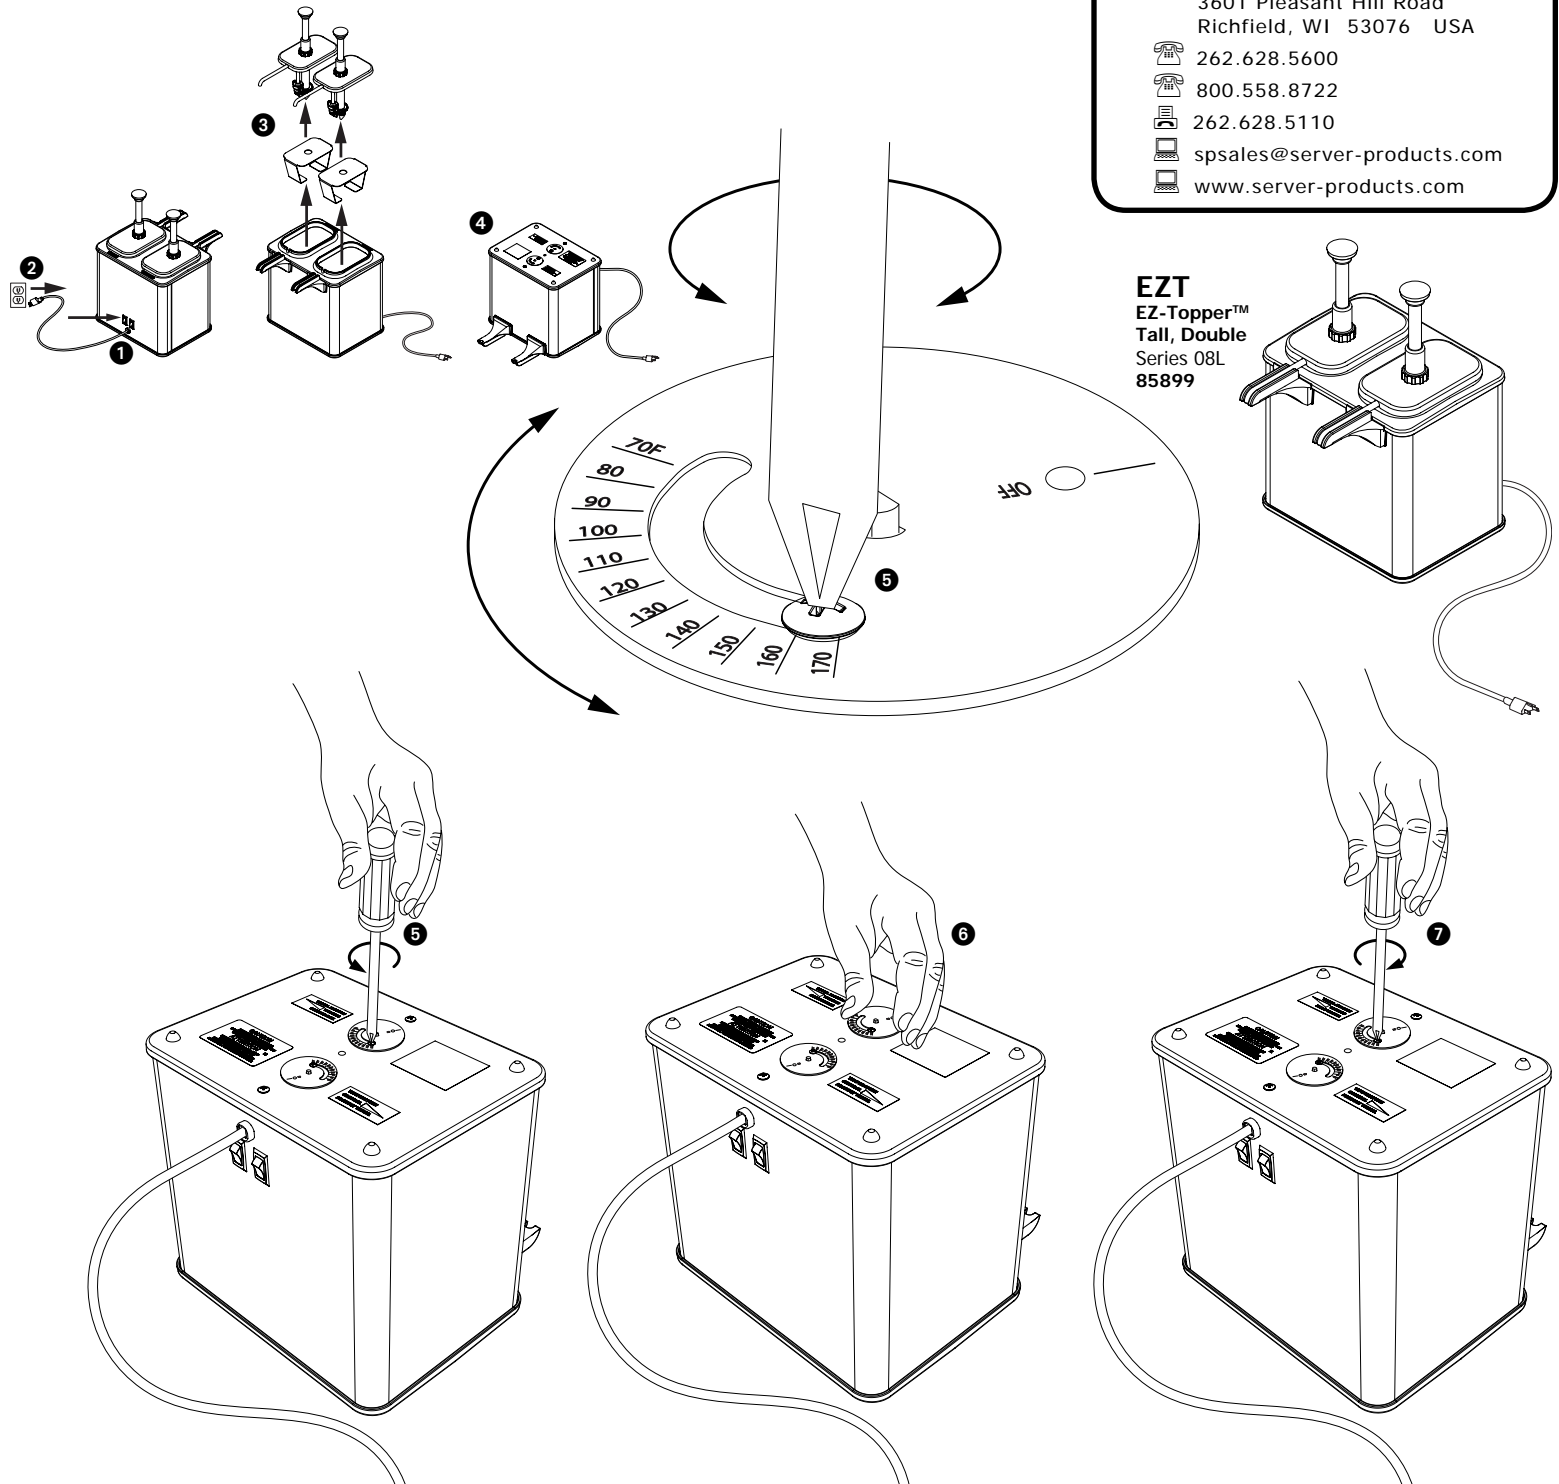

Server Products Inc.
 3601 Pleasant Hill Road
 Richfield, WI 53076 USA
 262.628.5600
 800.558.8722
 262.628.5110
 spsales@server-products.com
 www.server-products.com

**EZT
EZ-Topper™
Tall, Double
Series 08L
85899**

