




1 Prewash lid and bowl assembly in dishwasher.

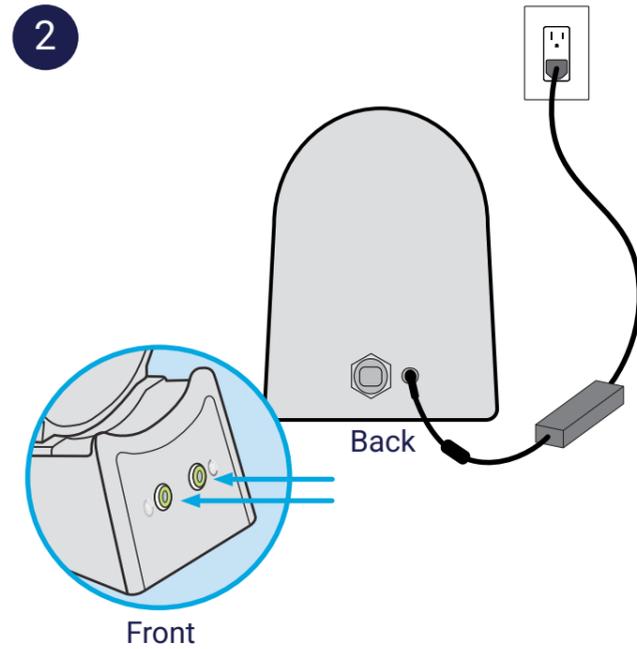


2 Insert barrel plug into back of base. Plug cord into power outlet. Ensure the front buttons illuminate.

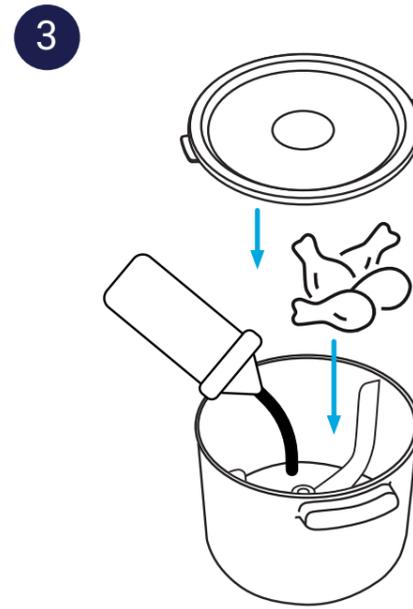


3 Place order of wings in the bowl and dispense the required sauce on top of the wings. Attach lid securely to the bowl.

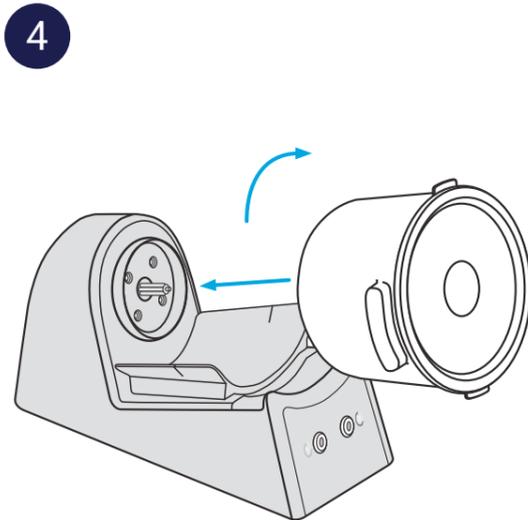

4 With the lid attached, insert the bowl into the base hub and twist clockwise until the bowl nests in the locking feature.

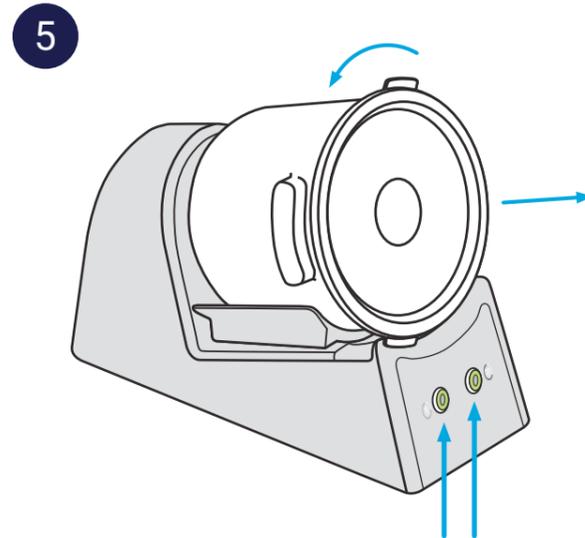

5 Push the appropriate button to actuate the spin and run for 15 or 20 seconds. After the cycle is complete, simply rotate the bowl counterclockwise and pull to remove the bowl from the base.

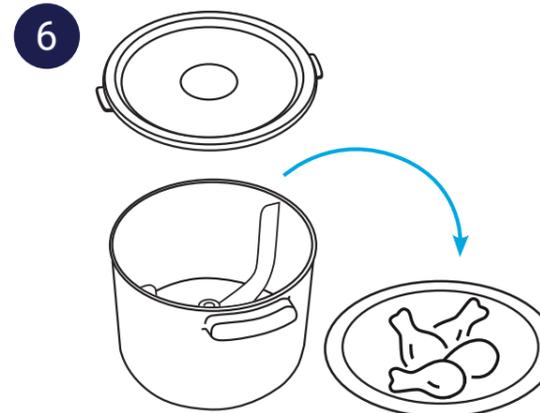

6 Remove lid and plate wings.



Scan for Spin+® Sauce Coater manual or visit https://server-products.com/lxDM_Spin.pdf

