


QUICK START GUIDE

Server 1 Gallon Server


Tips and tricks to help you get started with your new 1 Gallon Server.

1 Remove unit from box. Clean, rinse, sanitize, and dry all parts.




⚠ ⚠
Never immerse complete unit into water. Electrical shock could occur.


2 Assemble the faucet after cleaning. Insert cup seat into faucet.




3 Install top onto faucet. Lubricate threads with a small amount of clean water.



4 Rotate top clockwise to secure.



5 Install washer onto threaded shank of faucet. Flat side of washer must face faucet. Round side of washer must face away from faucet.

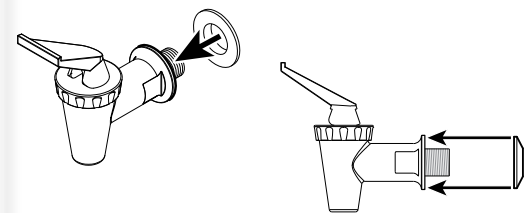

6 Install faucet into hole. Attach nut to faucet from inside vessel.

YES



- Round side of washer seals inside hole.
- Tighten nut until snug.

NO


- Flat side of washer must not face hole.
- Do not over-tighten nut.

Overtightened nut will strip threads and cause washer to leak.


Overtightened nut will flatten washer and cause leak.

7 Pour pre-heated au jus into the unit and cover with lid.



8 Plug cord into power source. Press switch to the "ON" position. Thermostat is factory preset at 160° F.

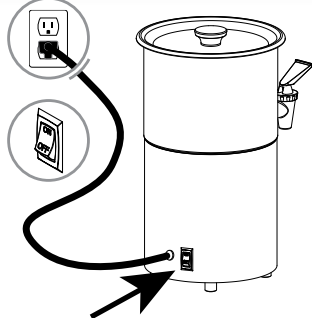

WANT TO LEARN MORE?

Visit server-products.com/manual-more for your manual, part breakdown, support videos and more.
spsales@server-products.com | 800.558.8722



MODEL
XXXX
P/N
#####

NSF

SERIES
##X ##X

2 YEAR
WARRANTY

REFERENCE YOUR PART NUMBER (P/N) LOCATED ON THE LID OR BASE.